
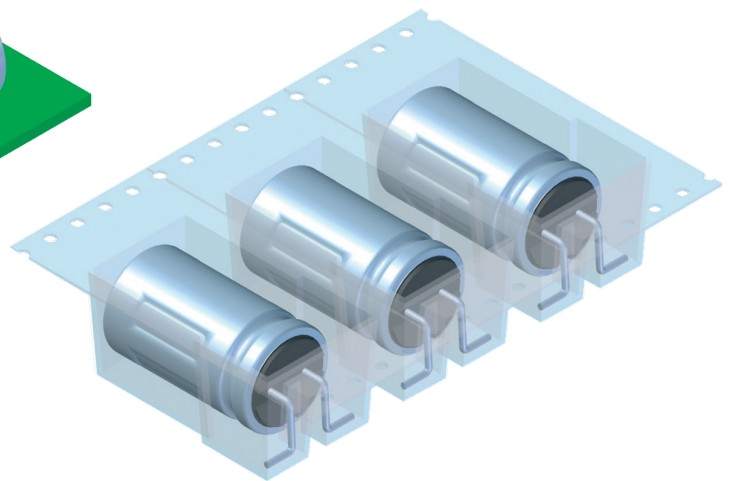


Kondensatoren und
Bauelemente GmbH Freiberg

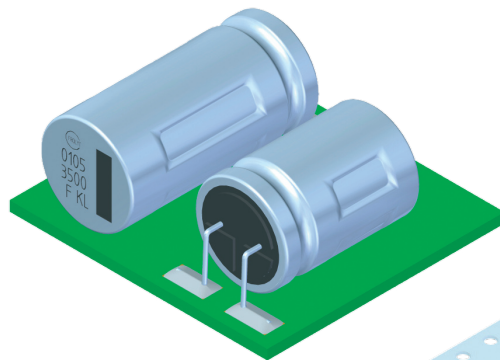


Pseudo - SMD



von FROLYT

- Elko für Oberflächenmontage mit bleifreiem Reflowlötverfahren für höchste Anforderungen
- Thermofixierung während des Lötprozesses zur Realisierung großer Schwingungsbelastungen (30g, 3 Ebenen, rascher Temperaturwechsel)
- hohes CxU- Produkt im Spannungsbereich 6,3V- 450V
- Temperaturbereich – 55°C...+ 125°C (135°C)
- Lieferung im Blistergurt auf Rolle
- auf Kundenwunsch mit Mantelisololation Ø 8,7...18,0 mm
- Kennwertanpassung nach Einsatzspezifik
- Eintrag im Deutschen Patent- und Markenamt
- **Nennabmessungen:**

Ø 8,7x12,7mm,	Ø 10,0x12,7mm,	Ø 10,0x16,5mm,	Ø 10,0x21,0 mm,
Ø 12,5x21,0 mm,	Ø 12,5x25,0 mm,	Ø 12,5x30,0 mm,	Ø 16,5x22,0 mm,
Ø 16,5x26,0 mm,	Ø 16,5x30,0 mm,	Ø 16,5x36,0 mm,	Ø 18,0x21,0 mm,
Ø 18,0x26,0 mm,	Ø 18,0x30,0 mm,	Ø 18,0x36,5 mm	



Kondensatoren und
Bauelemente GmbH Freiberg

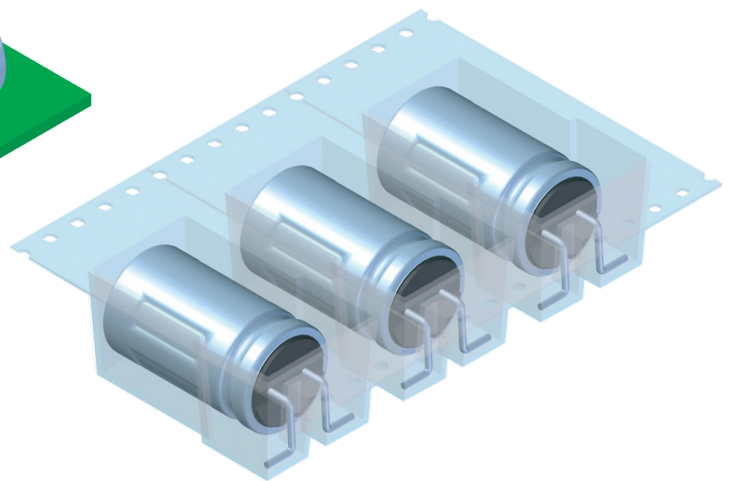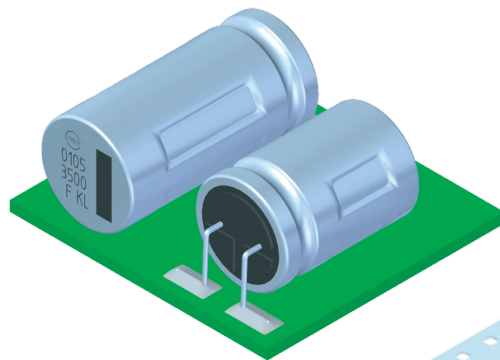

Pseudo - SMD of FROLYT

- Capacitor for surface mounting utilizing lead-free reflow soldering and meeting the highest requirements
- thermo fixing during the soldering process for high endurance against stress of vibration (30g, three planes, fast temperature change)
- high capacitance/voltage combinations within the voltage range from 6.3 V to 450 V
- temperature range - 55 °C to + 125 °C (135 °C)
- delivered in blister tapes on reel
- if required with sheath insulation \varnothing 8.7...18.0 mm
- customized characteristics for specific end-use possible
- Registered at the German Patent and Trademark Office

- nominal dimensions:

\varnothing 8,7x12,7mm,	\varnothing 10,0x12,7mm,	\varnothing 10,0x16,5mm,	\varnothing 10,0x21,0 mm,
\varnothing 12,5x21,0 mm,	\varnothing 12,5x25,0 mm,	\varnothing 12,5x30,0 mm,	\varnothing 16,5x22,0 mm,
\varnothing 16,5x26,0 mm,	\varnothing 16,5x30,0 mm,	\varnothing 16,5x36,0 mm,	\varnothing 18,0x21,0 mm,
\varnothing 18,0x26,0 mm,	\varnothing 18,0x30,0 mm,	\varnothing 18,0x36,5 mm	